

Make Better Use of Empty Panel Space with JAC Glove Boxes

JA72-408 Glove Box with USB C and A Chargers Data Sheet




Description

Charge your portable devices and keep organized with the JA72-408. As well as a large aperture for storage (4.4 ins x 1.58 ins, 11 x 4 cms), these units provide USB Type A and Type C charging ports in a single Dzus mount panel. The Type A USB port is capable of supplying 5 Volts DC at up to 2.1 Amps and the Type C port is capable of supplying 5 / 9 / 12 / 15 Volts DC at up to 3.0 Amps and 20 Volts DC at 2.25 Amps.

Alternative sizes and styles of Glove boxes and USB chargers may be found at http://www.jupiteravionics.com/productglovebox.php





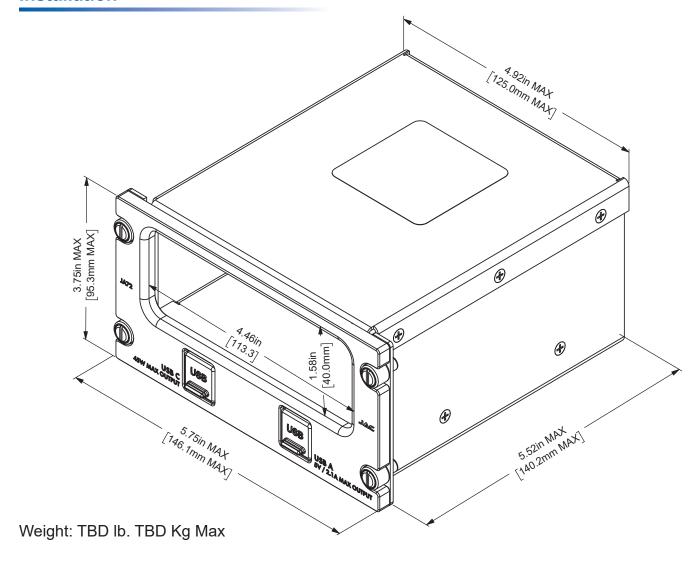

Environment and Performance

| Input Current | 3.25 A Max @ 28 Vdc |
|-----------------------|----------------------------|
| Input Voltage Range | 20.5 to 32.2 Vdc |
| Operating Temperature | -45 °C to +70 °C |
| Survival Temperature | -55 °C to +85 °C |
| Altitude | 55,000 ft. max |
| TSO Compliance | Contact JAC for TSO status |

| Installation Kit | INST-JA72 |
|------------------|---------------|
| Storage Capacity | 1 lb. [450 g] |

