



JUPITER AVIONICS

C O R P O R A T I O N

JA80-020 - Panel Mount Intercom - 4 Place

Data Sheet



Description

The JA80-020 is a compact four place voice activated intercom that provides transceiver access for both Users 1 and 2.

The wide input voltage and temperature ranges also allow for use in non-aviation installations. The transceiver interface is adjustable for non-aircraft radios.


Features

- VOX and Transmit Annunciators
- Individual Mic. Gating
- User 1 has Transmit Priority
- 11 – 30 Vdc Input range
- Music Input on Front Panel
- Compact Design
- Up to 400 mW Audio Power per Headset
- User 1 directly connected to Radio when Intercom is powered off.



JA80-020 Specifications

Installation

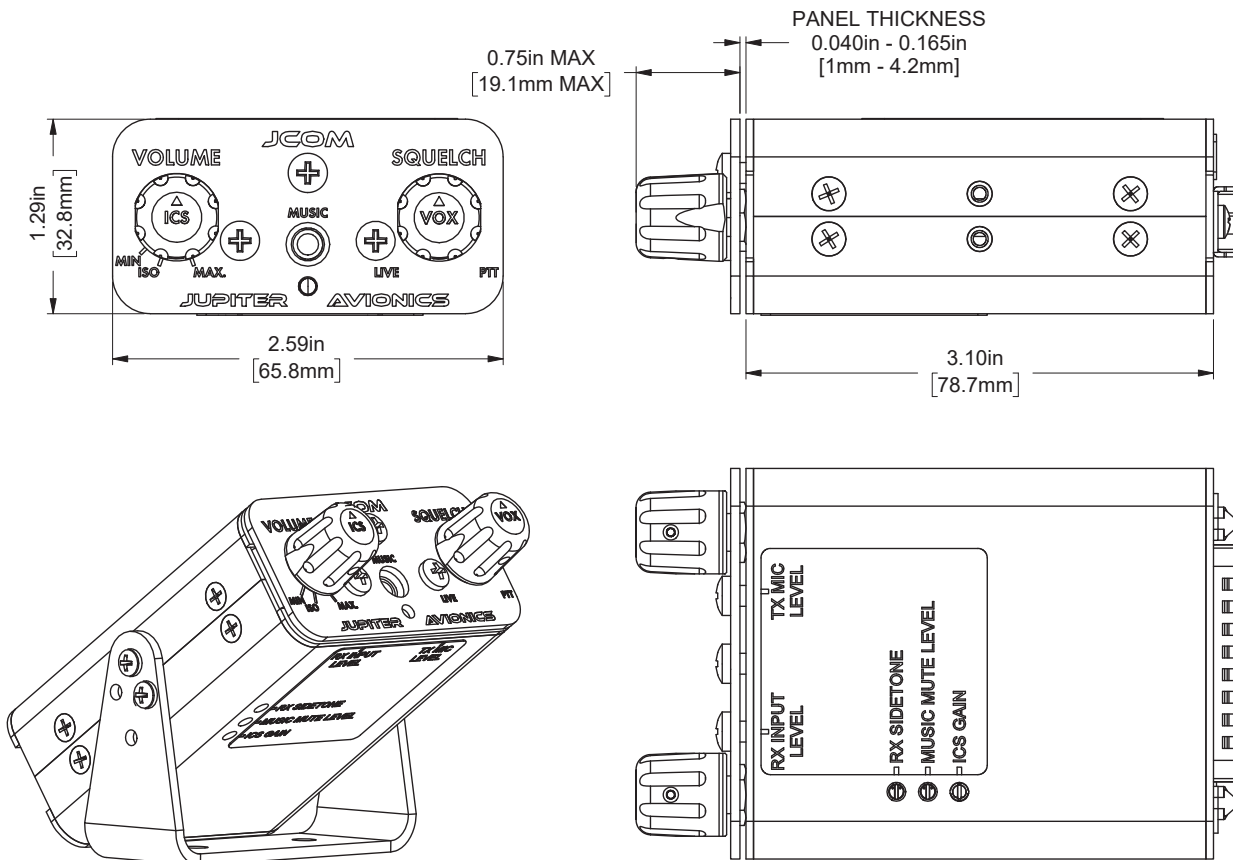

Optional Mounting Bracket
INST-JA80BR

Weight: TBD lbs [TBD kg] MAX.

Environment and Performance

Electrical Power	11 - 30 Vdc @ 0.5 A Max
Operating Temperature	-40 C to +70 C
Altitude	50,000 ft. Max
Humidity	95%, 48 hrs
Operating Shock	6g (any axis)
Crash Safety	20g (any axis)
TSO Compliance	Contact JAC for TSO status
Installation Kit	INST-JA80
Optional Mounting Bracket	INST-JA80BR